
Yorfloor®

Designed for Your Comfort

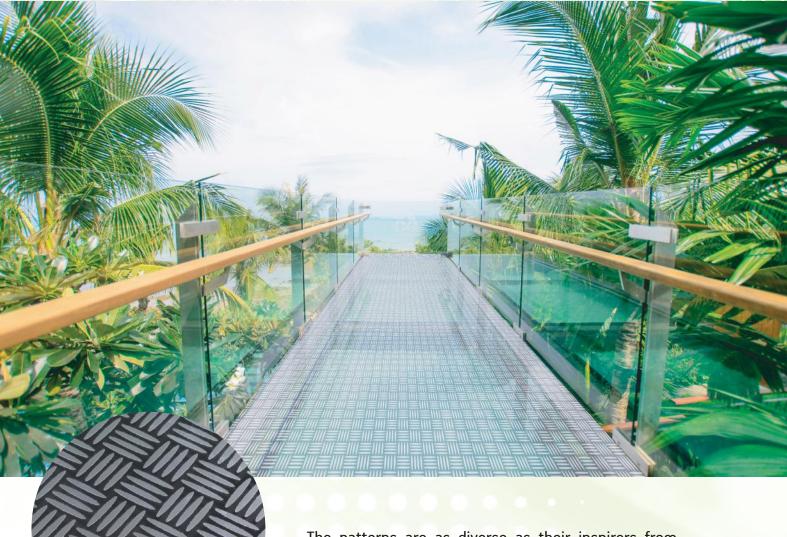

The patterns are as diverse as their inspirers from nature. But the standards for their applications remain the same: We aim to inspire you with our first class flexibility, quality and reliability.

Certificated Safety

The special Yorfloor® collection for flooring and glass stair projects consists of 6 patterns in total. Each of these patterns was tested and certified by the leading European Work Safety institution "IFA" for their anti-slip degrees.

Certificated R11 Anti-Slip Degree from IFA Institute (Germany)



Yorfloor®


Outstanding Performance



Certificated R10 Anti-Slip Degree from IFA Institute (Germany)




Certificated R10 Anti-Slip Degree from IFA Institute (Germany)



Certificated R10 Anti-Slip Degree from IFA Institute (Germany)



Certificated R11 Anti-Slip Degree from IFA Institute (Germany)



Certificated R12 Anti-Slip Degree from IFA Institute (Germany)



Certificated R11 Anti-Slip Degree from IFA Institute (Germany)

Properties

- Standard sizes 321x225cm or 160,5x225cm
- · Consistent finish and appearance
- No degration, nor wear, does not pickle or discolor, and will not change over time
- · Soft and silk to the touch
- Any process such as cutting, polishing, or beveling, it allows easy bending, lamination and temperate toughening
- · Ease of cleaning and resistance to marks and stains
- Resistant to common cleaners because it is not an additive, or a bonded layer
- Does not peel or discolor like films
- · Does not scratch off like coatings

Take security one step further by using the new Yorfloor®-COMFORT.

As a decorative and functional decking material Yorfloor® Comfort by Yorglass provides you clear added value for your applications with its unmatched features.

Anti - Slip Safety: In accordance with DIN 51130 (2010) Standard and R10 safety classes, Yorfloor® Comfort is suitable for use in parking areas, traffic paths, entrances, sanitary areas and indoor or outdoor stairs.

Abrasion Resistance

Yorfloor® Comfort stands our with its guaranted performance through its abrassion resistance. According to EN 13748-2 Standard Yorfloor® Comfort clasified as HG class floor tiles with an average of 9 cm3/50cm2.

Flexural Loading: 10 + 10 + 10 Laminated Layer 300 x 600 mm average 131 N/mm2 300x750mm average 140 N/mm2 300x900mm average 146 N/mm2

Colours and finishings in the photographs may look slightly different from those of the real products: We recommend that customers examine sample glass before choosing products.

